

## Features

Ultra-slim 1 Pole - 6 A relay


Printed circuit mount

- direct or via PCB socket

35 mm rail mount

- via screw or screwless sockets



- 1 Pole changeover contacts or 1 Pole normally open contact
- Ultra slim, 5 mm, package
- Sensitive DC coil - 170 mW (Dual AC/DC coil drive possible using 93 series sockets)
- UL Listing (certain relay/socket combinations)
- Cadmium Free contact materials
- 8/8 mm clearance/creepage distance
- 6 kV (1.2/50  $\mu$ s) insulation, coil-contacts

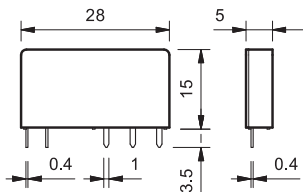

## 34.51



- 5 mm wide
- Low coil power
- PCB or 93 series sockets

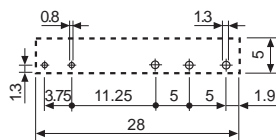

Copper side view

FOR UL HORSEPOWER AND PILOT DUTY RATINGS  
SEE "General technical information" page V

Contact specification		
Contact configuration		1 CO (SPDT)
Rated current/Maximum peak current	A	6/10
Rated voltage/Maximum switching voltage V AC		250/400
Rated load AC1	VA	1,500
Rated load AC15 (230 V AC)	VA	300
Single phase motor rating (230 V AC)	kW	0.185
Breaking capacity DC1: 30/110/220 V	A	6/0.2/0.12
Minimum switching load	mW (V/mA)	500 (12/10)
Standard contact material		AgNi
Coil specification		
Nominal voltage (U <sub>N</sub> )	V AC (50/60 Hz)	—
	V DC	5 - 12 - 24 - 48 - 60
Rated power AC/DC	VA (50 Hz)/W	—/0.17
Operating range	AC	—
	DC	(0.7...1.5)U <sub>N</sub>
Holding voltage	AC/DC	—/0.4 U <sub>N</sub>
Must drop-out voltage	AC/DC	—/0.05 U <sub>N</sub>
Technical data		
Mechanical life AC/DC	cycles	—/10 · 10 <sup>6</sup>
Electrical life at rated load AC1	cycles	60 · 10 <sup>3</sup>
Operate/release time	ms	5/3
Insulation between coil and contacts (1.2/50 $\mu$ s)	kV	6 (8 mm)
Dielectric strength between open contacts V AC		1,000
Ambient temperature range	°C	—40...+85
Environmental protection		RT II
Approvals (according to type)		

## Features

Ultra-slim - Solid State Relays


Printed circuit mount

- direct or via PCB socket

35 mm rail mount

- via screw or screwless sockets



- Single circuit output switching options
  - 2 A 24 V DC
  - 0.1 A 48 V DC
  - 2 A 240 V AC
- Silent, high speed switching with long electrical life
- Ultra slim, 5 mm, package
- Sensitive DC Input circuits (Dual AC/DC input drive possible using 93 series sockets)
- UL Listing (certain relay/socket combinations)
- Wash tight: RT III
- 2,500 V insulation, input-output

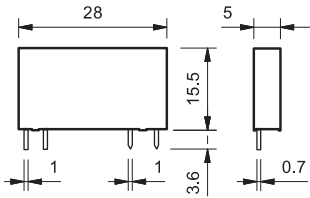

### 34.81-9024



- 2 A, 24 V DC output switching
- PCB or 93 series sockets

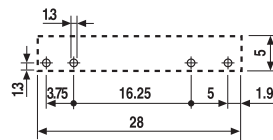



Copper side view

### 34.81-7048



- 0.1 A, 48 V DC output switching
- PCB or 93 series sockets

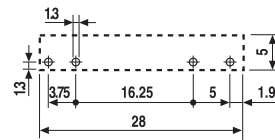



Copper side view

### 34.81-8240



- 2 A, 240 V AC output switching
- Zero crossing switching
- PCB or 93 series sockets

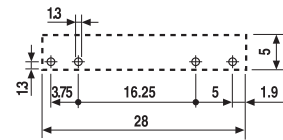

Copper side view


Output circuit									
Contact configuration		1 NO (SPST-NO)			1 NO (SPST-NO)		1 NO (SPST-NO)		
Rated current/Maximum peak current (10 ms) A		2/20			0.1/0.5		2/40		
Rated voltage/Maximum blocking voltage V		(24/33)DC			(48/60)DC		(240/275)AC		
Switching voltage range V		(1.5...24)DC			(1.5...48)DC		(12...240)AC		
Minimum switching current mA		1			0.05		22		
Max. "OFF-state" leakage current mA		0.001			0.001		1.5		
Max. "ON-state" voltage drop V		0.12			1		1.6		
Input circuit									
Nominal voltage V DC		5	24	60	24	60	5	24	60
Rated power AC/DC W		0.035	0.17	0.18	0.17	0.18	0.060	0.17	0.18
Operating range V DC		3.5...12	16...30	35...72	16...30	35...72	3.5...10	16...30	35...72
Control current mA		7	7	3	7	3	12	7	3
Release voltage V DC		1	10	20	10	20	1	10	20
Impedance Ω		715	3,200	21,300	3,200	21,300	416	3,200	21,300
Technical data									
Operate/release time ms		0.1/0.6*			0.04/0.6*		12/12*		
Dielectric strength between input/output V		2,500			2,500		2,500		
Ambient temperature range °C		-20...+60			-20...+60		-20...+60		
Environmental protection		RT III			RT III		RT III		
Approvals (according to type)									

\* Note: all technical data relates to using the relay directly on PCB or PCB socket type 93.11.  
If the relay is use with 35 mm rail socket types 93.01, 93.21 or 93.51, refer to the technical data of 38 Series.

## Ordering information

### Electromechanical relay (EMR)

Example: 34 series slim electromechanical relay, 1 CO (SPDT) 6 A contacts, 24 V sensitive DC coil.

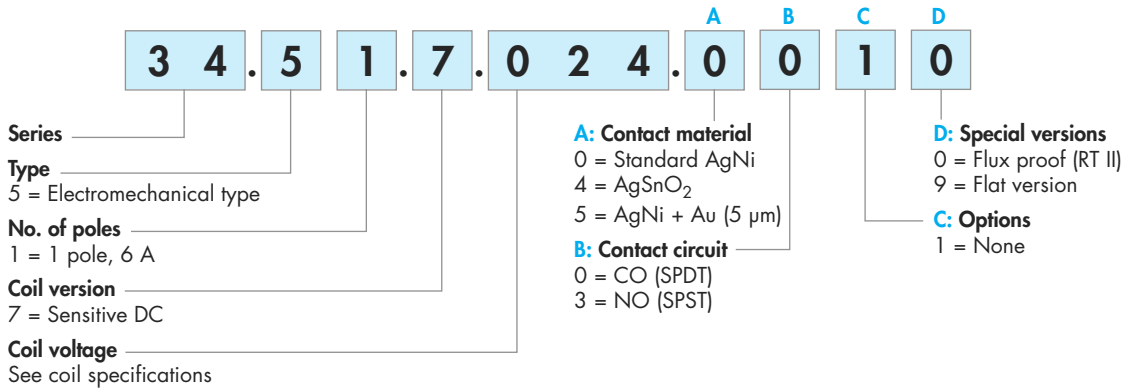


Selecting features and options: only combinations in the same row are possible. Preferred selections for best availability are shown in **bold**.

Type	Coil version	A	B	C	D
34.51	sens. DC	<b>0</b> - 4 - 5	<b>0</b> - 3	<b>1</b>	<b>0</b>
34.51	sens. DC	0 - 4 - 5	0	1	9

### Solid state relay (SSR)


Example: 34 series SSR relay, 2 A output, 24 V DC supply.

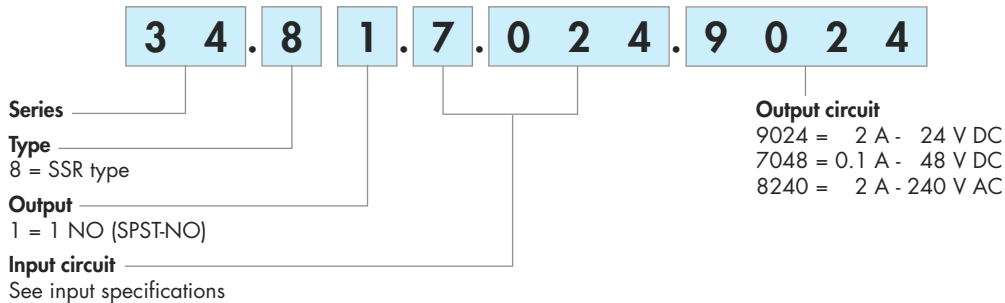

## Flat pack version



Option = 34.51.7xxx.x019

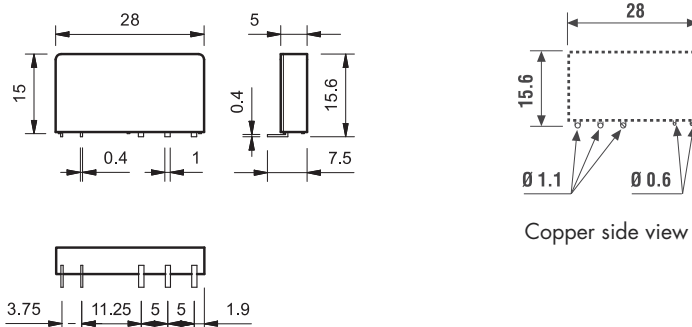


## Electromechanical relay

### Technical data


Insulation according to EN 61810-1			
Nominal voltage of supply system	V AC	230/400	
Rated insulation voltage	V AC	250	400
Pollution degree		3	2
Insulation between coil and contact set			
Type of insulation		Reinforced	
Overvoltage category		III	
Rated impulse voltage	kV (1.2/50 $\mu$ s)	6	
Dielectric strength	V AC	4,000	
Insulation between open contacts			
Type of disconnection		Micro-disconnection	
Dielectric strength	V AC/kV (1.2/50 $\mu$ s)	1,000/1.5	
Conducted disturbance immunity			
Burst (5...50)ns, 5 kHz, on A1 - A2		EN 61000-4-4	level 4 (4 kV)
Surge (1.2/50 $\mu$ s) on A1 - A2 (differential mode)		EN 61000-4-5	level 3 (2 kV)
Other data			
Bounce time: NO/NC	ms	1/6	
Vibration resistance (5...55)Hz: NO/NC	g	10/5	
Shock resistance	g	20/14	
Power lost to the environment	without contact current	W	0.2
	with rated current	W	0.5
Recommended distance between relays mounted on PCB	mm	$\geq 5$	

### Contact specification

F 34 - Electrical life (AC) v contact current

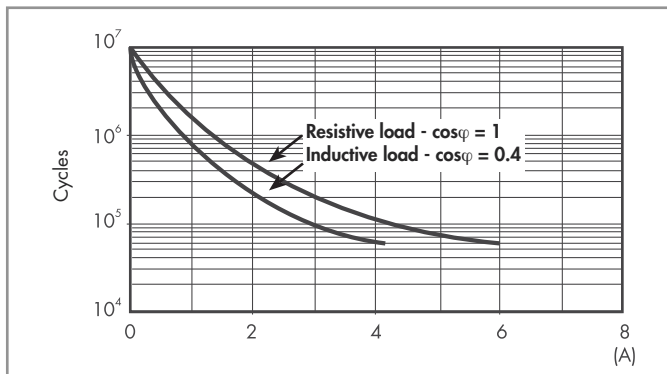

H 34 - Maximum DC1 breaking capacity

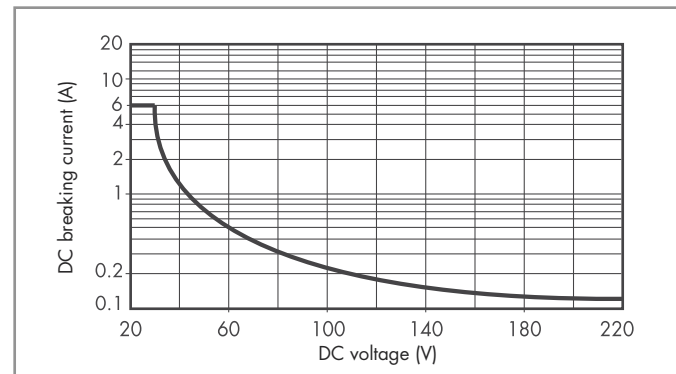


- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of  $\geq 60 \cdot 10^3$  can be expected.
- In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load. Note: the release time for the load will be increased.

### Coil specifications

DC coil data

Nominal voltage $U_N$ V	Coil code	Operating range		Resistance R $\Omega$	Rated coil consumption I at $U_N$ mA
		$U_{min}$ V	$U_{max}$ V		
5	7.005	3.5	7.5	130	38.4
12	7.012	8.4	18	840	14.2
24	7.024	16.8	36	3,350	7.1
48	7.048	33.6	72	12,300	3.9
60	7.060	42	90	19,700	3

R 34 - DC coil operating range v ambient temperature

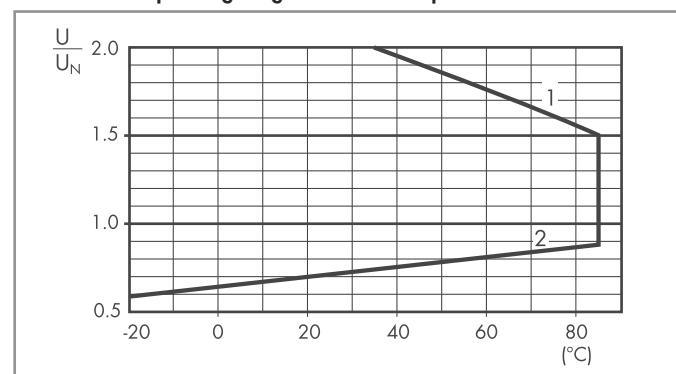

- 1 - Max. permitted coil voltage.
- 2 - Min. pick-up voltage with coil at ambient temperature.

## Solid state relay

### Technical data

#### Other data

Power lost to the environment	without output current	W	0.17
	with rated current	W	0.4

### Input specification


#### Input data - DC types

Nominal voltage $U_N$ V	Input code	Operating range		Release voltage V	Impedance $\Omega$	Control current I at $U_N$ mA
		$U_{min}$ V	$U_{max}$ V			
5	7.005	3.5	12 (10*)	1	715 (416*)	7 (12*)
24	7.024	16	30	10	3,200	7
60	7.060	35	72	20	21,300	3

\* AC Output version.

### Output specification

**L 34 - Output current v ambient temperature**  
SSR - 2 A DC & AC output types

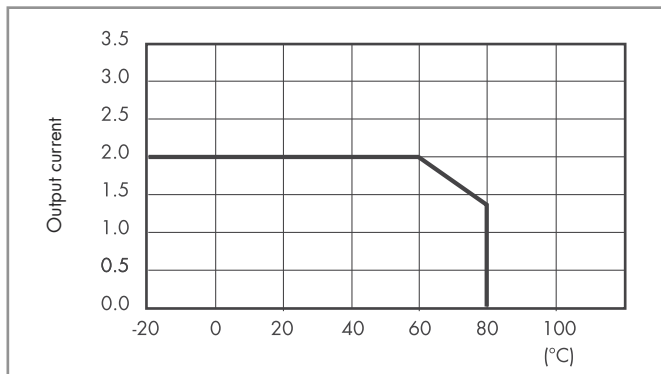

**L 34 - Output current v ambient temperature**  
SSR - 0.1 A DC output types

